




FLOTATION COLLARS

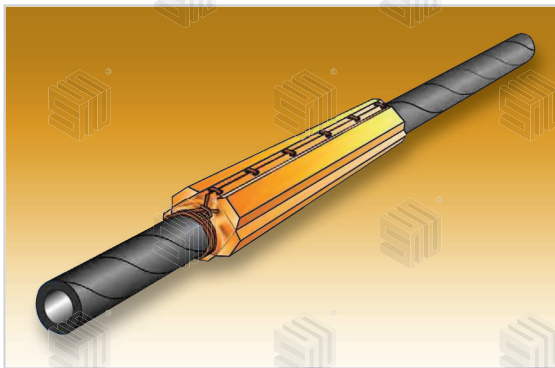

Flotation Collars are designed to be installed on our offshore rig supply hoses. Once fitted the flotation collars will provide sufficient buoyancy to prevent the supply hose sinking to within the reach of supply vessel propeller, thus preventing unnecessary spillage and hose damage.

2 turns around hose to prevent slippage Clove hitch




Diagram of recommended method of attachment

MATERIAL	Durable reinforced double nylon outer material with flexible pocket type floats, double stitched, c/w 18 brass eyelets and 4 mt of lace-cord
GENERAL	5 strips 970 x 68 x 60
COLOUR	Orange
NO. REQUIRED	BARYTE = 12 Floats per 60' Hose MUD = 5-11 Floats per 60' Hose CEMENT = 8 Floats per 60' Hose WATER = 4 Floats per 60' Hose DIESEL = 4 Floats per 60' Hose

NUMBER OF FLOATS REQUIRED FOR 18.3MT (60') HOSE

DIA. (mm)	WATER	BARYTE	CEMENT	10lb MUD	12lb MUD	14lb MUD	15lb MUD
3"	4	-	-	8	9	11	12
4"	4	12	8	5	8	10	11
5"	4	15	9	-	-	-	-