




# MaxFlex® P4 Z

## LIGHT WEIGHT, DOUBLE-PLY SILICONE DUCTING

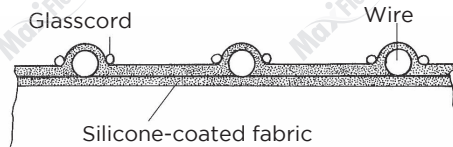

MATERIAL	Silicone-coated-glassfabric, double-ply
TEMPERATURE RESISTANCE	- 70°C up to + 250°C (interm. up to + 300°C)
SINGLE LENGTH	4 m, Special lengths available on request
COLOUR	Red-brown
APPLICATIONS	Suction of hot air and gases in paper processing, plastic industry and vehicle construction
PROPERTIES	Excellent heat resistance, maintains flexibility at low temperatures, very good chemical resistance

DIA. (mm)	WEIGHT (kg/m)	BEND. RAD (mm)	MAX. WORK. PRESS. (bar)	MAX. VACUUM (bar)
13	0,16	13	2,60	0,70
19	0,19	15	2,80	0,65
25	0,23	15	2,80	0,65
32	0,26	16	2,80	0,65
38	0,31	18	2,60	0,60
41	0,32	41	2,40	0,58
51	0,36	24	2,60	0,52
55	0,41	55	2,30	0,53
60	0,46	60	2,20	0,53
63	0,49	31	2,40	0,48
65	0,49	65	2,20	0,46
70	0,53	35	2,30	0,44
76	0,58	38	2,20	0,43
80	0,61	80	2,10	0,40
83	0,64	42	2,10	0,41
90	0,68	90	2,00	0,40
102	0,77	52	1,90	0,35
110	0,86	110	1,70	0,30
120	0,94	120	1,50	0,21
127	1,00	64	1,40	0,25
140	1,11	70	1,30	0,19
152	1,20	75	1,20	0,12
160	1,27	160	0,90	0,15
178	1,48	90	1,00	0,12
180	1,47	180	0,80	0,14
203	1,65	101	0,70	0,09
229	1,90	229	0,50	0,08
254	2,14	150	0,50	0,07
305	2,58	210	0,30	0,04

\* Further diameters available upon request. Technical data are based on +23°C.