




MaxLOCK®
GROUND JOINT




Features:

- Positive metal-to-polymer seal
- Leakproof seal forms when the metal head of the stem makes contact with the patented polymer seat in the spud
- Non-metallic polymer seat resists most chemicals found in manufacturing facilities
- Recommended for steam service up to **450°F (232°C)**
- Easy to seal
- Use with Maxlock® clamps

MAXLOCK GROUND JOINT MALE STEMS (MG-MS)	SIZE	OPTIONAL QTY
 Plated Iron	1/4"	100
	3/8"	100
	1/2"	100
	3/4"	50
 Plated Steel	1"	50
	1 1/4"	25
	1 1/2"	25
 316 Stainless Steel	2"	10
	2 1/2"	5
	3"	5
	4"	5
	6"	2
 Brass		

PART NUMBER

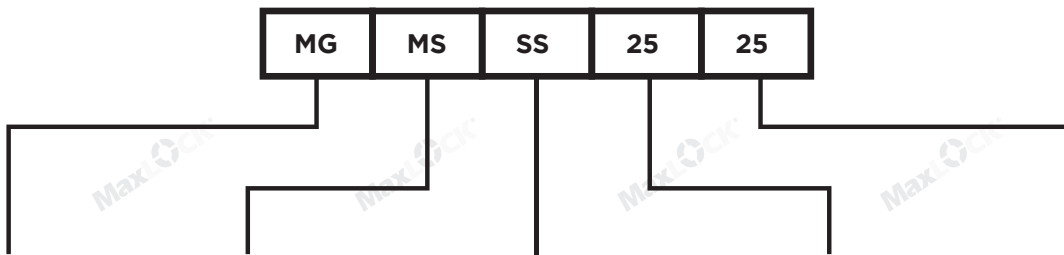

MODEL	PART NO.	MATERIAL	HOSE SIZE	COUPLING SIZE	
MG Maxlock Ground Joint	JS	PS Plated Steel	8 = 1/4"	8 = 1/4"	
	JC		10 = 3/8"	10 = 3/8"	
	WN		15 = 1/2"	15 = 1/2"	
	FS	SS Stainless Steel 316	20 = 3/4"	20 = 3/4"	
	MP		25 = 1"	25 = 1"	
	DS		32 = 1-1/4"	32 = 1-1/4"	
	FA	BR Brass	40 = 1-1/2"	40 = 1-1/2"	
	MA		50 = 2"	50 = 2"	
	MS		65 = 2-1/2"	65 = 2-1/2"	
				80 = 3"	80 = 3"
				100 = 4"	100 = 4"
				150 = 6"	150 = 6"