




MaxLOCK® QRC 2 SERIES

Interchangeable with Snaptite 61 Series, Parker 6600, Aeroquip 5600, Dixon K Series.

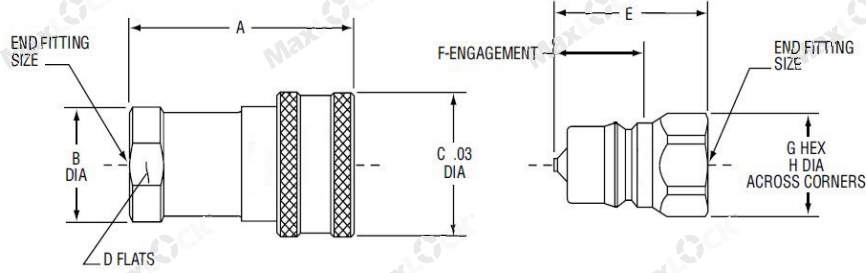

SIZE	A	B	C	D	E	F	G	H
¼" (mm)	1.94 (49.28)	0.88 (22.35)	1.06 (26.92)	0.75 (19.05)	1.45 (19.05)	0.64 (16.26)	0.75 (19.05)	0.83 (21.08)
¼" x ⅜" (mm)	1.94 (49.28)	0.88 (22.35)	1.06 (26.92)	0.81 (20.57)	1.45 (19.05)	0.64 (16.26)	0.81 (20.57)	0.89 (22.60)
⅜" (mm)	2.34 (59.44)	1.06 (26.92)	1.27 (32.25)	0.88 (22.35)	1.76 (44.70)	0.82 (20.83)	0.88 (22.35)	0.96 (24.38)
⅜" x ½" (mm)	2.34 (59.44)	1.06 (26.92)	1.27 (32.25)	1.00 (25.40)	1.76 (44.70)	0.82 (20.83)	1.00 (25.40)	1.10 (27.94)
½" (mm)	2.71 (68.83)	1.19 (30.23)	1.50 (38.10)	1.00 (25.40)	2.00 (50.80)	1.00 (25.40)	1.06 (26.92)	1.17 (29.72)
½" x ⅝" (mm)	2.71 (68.83)	1.19 (30.23)	1.50 (38.10)	1.13 (28.70)	2.00 (50.80)	1.00 (25.40)	1.13 (28.70)	1.24 (31.50)
¾" (mm)	3.27 (83.06)	1.61 (40.89)	1.88 (47.75)	1.38 (35.05)	2.44 (61.98)	1.31 (33.27)	1.38 (35.05)	1.51 (38.35)
1" (mm)	3.68 (93.47)	1.86 (47.24)	2.13 (54.10)	1.63 (41.40)	2.67 (67.82)	1.59 (40.39)	1.63 (41.40)	1.79 (45.47)

MaxLOCK® PART NUMBER



SERIES	MATERIAL	COUPLING TYPE	COUPLING SIZE	END FITTING SIZE	END FITTING TYPE	SEALS	OPTIONS
QRC 2	BR Brass	C Coupler	8 = ¼" 10 = ⅜"	8 = ¼" 10 = ⅜"	F Female NPT	Std. seal is Buna	SL Sleeve Lock
	SS 316 Stainless Steel	N Nipple	15 = ½" 20 = ¾"	15 = ½" 20 = ¾"	M Male NPT	V Viton	
	ST Steel		25 = 1"	25 = 1"	H Hose End	E Ethylene Propylene Rubber	
						M MIL-H-5606	