


SHIN • YO ENGINEERING SDN BHD (510968-K)


www.shinyoeng.com




MaxLCCK® QRC-7 SERIES


Interchangeable with Snaptite 71 Series, Dixon ST Series.









SIZE	A	B (Hex)*	C (Hex)*	D (Dia)	E	F	G
¼" (mm)	3.27 (83.06)	0.81 (20.57)	0.94 (23.88)	1.19 (49.78)	1.96 (49.78)	1.84 (46.74)	0.53 (13.46)
3/8" (mm)	4.00 (101.60)	1.00 (25.40)	1.19 (30.23)	1.56 (39.62)	2.36 (59.95)	2.32 (58.93)	0.63 (17.27)
½" (mm)	4.43 (112.52)	1.50 (38.10)	1.50 (38.10)	1.88 (47.75)	2.77 (70.36)	2.38 (60.45)	0.72 (18.29)
¾" (mm)	5.13 (130.30)	1.75 (44.45)	1.75 (44.45)	2.25 (57.15)	3.05 (77.47)	2.96 (75.18)	0.88 (22.35)
1" (mm)	5.60 (142.24)	1.88 (47.75)	2.00 (50.80)	2.63 (66.80)	3.32 (84.33)	3.23 (82.04)	0.95 (24.13)
1¼" (mm)	6.22 (157.99)	2.00 (50.80)	2.00 (50.80)	2.63 (66.80)	3.67 (93.22)	3.50 (88.90)	0.95 (24.13)







SIZE	A	B (Hex)*	C (Hex)*	D (Dia)	E	F	G
1½" (mm) 2" (mm)	7.60 (193.04) 7.60 (193.04)	, ,	3.38 (85.85) 3.38 (85.85)	4.50 (114.30) 4.50 (114.30)	, ,	4.50 (114.30) 4.50 (114.30)	3.21 (81.53) 3.21 (81.53)

^{*}Hex dimensions are taken from flat of hex and not across corners. Hex may be substituted with round stock. Hex column would then indicate dimension taken across wrench flats.

Decimal dimensions are 3.06 in. (1.5mm)

Dimensions are subject to change without notice.

Part configurations are typical and do not necessarily represent actual appearance.




SHIN • YO ENGINEERING SDN BHD (510968-K)

www.shinyoeng.com





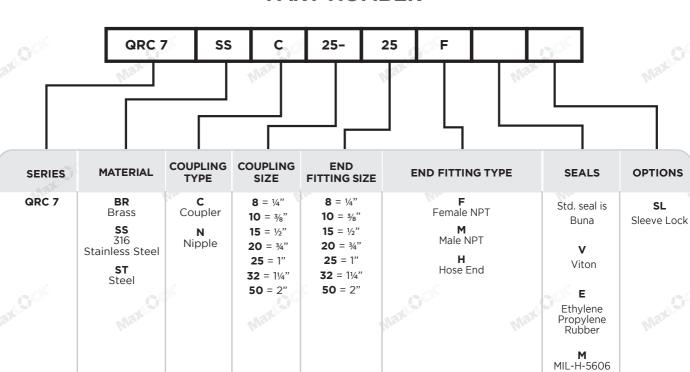

7 Series	7 Series
N/A	N/A
7-SDP-8	7-SDC-8
7-SDP-10	7-SDC-10
7-SDP-15	7-SDC-15
7-SDP-20	7-SDC-20
7-SDP-25	7-SDC-25
7-SDP-32	7-SDC-32
7-SDP-50	7-SDC-50
	7-SDP-8 7-SDP-10 7-SDP-15 7-SDP-20 7-SDP-25 7-SDP-32

*	Upon	request.
---	------	----------

WORKING PRESSURE

SIZE	PRESSURE		
	PSI	BAR	
1/4"	5000	344	
3/8"	5000	344	
1/2"	5000	344	
3/4"	5000	344	
1"	4000	275	
1¼"	4000	275	
2"	3000	206	

^{*} Based on Stainless Steel material.